



## FAST, RELIABLE PERFORMANCE

### EC-44 Dishmachine


- ▲ Extended 18" wash section provides consistent results.
- ▲ Separation of wash and rinse sections help prevent water contamination in the final rinse.
- ▲ Machine design provides high throughput, 244 racks per hour.

Leasing a dishmachine from Ecolab allows you to focus on your business with the security of knowing your warewashing operation is properly managed.




# Superior Results, 24/7 Service and a Great Financial Option.

## LEFT TO RIGHT

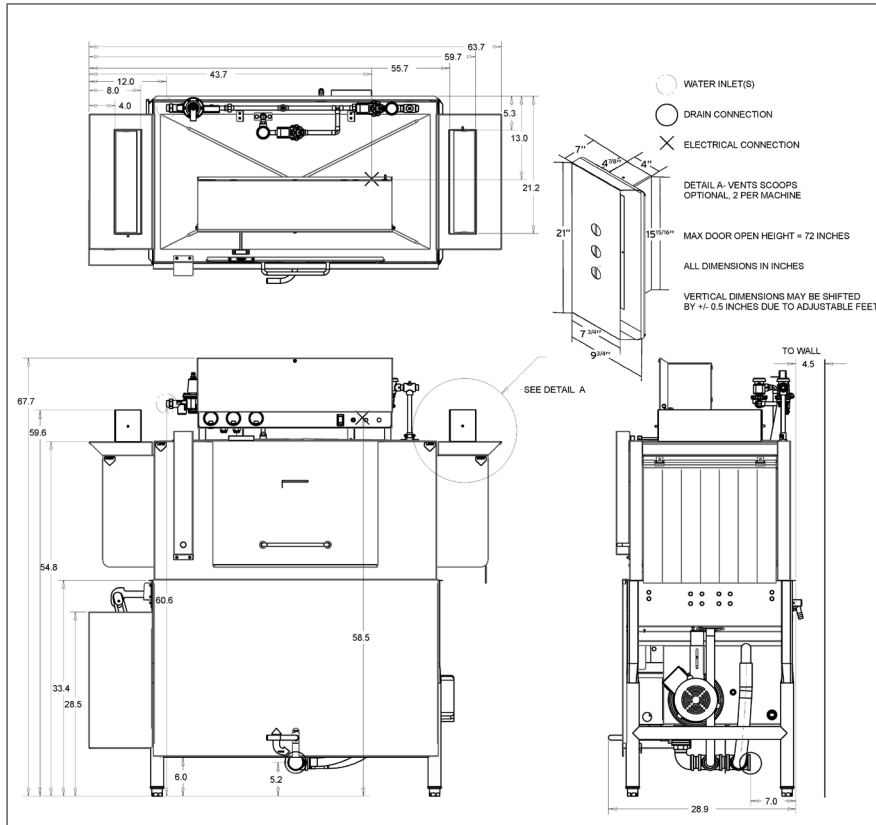

## RIGHT TO LEFT

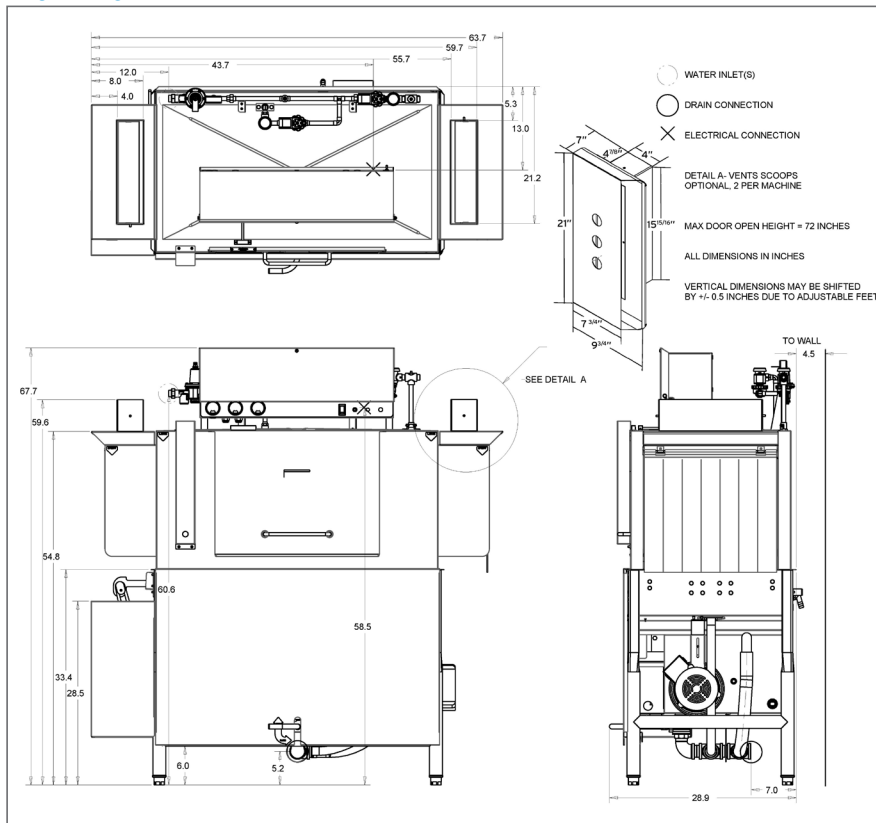

## SPECIFICATIONS

### OPERATING CAPACITY

Racks per Hour	244
----------------	-----

### OPERATING TEMPERATURES

Wash (min)	140° F
low-temp	140° F
high-temp	160° F

Sanitizing Rinse (min)	120° F
low-temp	120° F
high-temp	180° F

### WATER CONSUMPTION

Gallons per Rack	0.91
------------------	------

### ELECTRICAL RATINGS

Wash Pump	2 hp
-----------	------

Drive Motor	1/4 hp
-------------	--------

### WASH CHAMBER

Internal Height	18"
-----------------	-----

### WEIGHT

Machine Weight	626 lbs
----------------	---------

### UTILITY REQUIREMENTS ELECTRICAL

Voltage/Frequency/Phase:	208V/60Hz/3 Ph
Total Amperage	48.75 A
Minimum Electrical Circuit	60 A

Voltage/Frequency/Phase:	230V/60Hz/3 Ph
Total Amperage	44.6 A
Minimum Electrical Circuit	50 A

Voltage/Frequency/Phase:	460V/60Hz/3 Ph
Total Amperage	22.3 A
Minimum Electrical Circuit	25 A

Voltage/Frequency/Phase:	208V/60Hz/1 Ph
Total Amperage	82.65 A
Minimum Electrical Circuit	90 A

Voltage/Frequency/Phase:	230V/60Hz/1 Ph
Total Amperage	75.85 A
Minimum Electrical Circuit	80 A

### WATER

Waterline Size (min)	1/2"
Flow Pressure (required)	15-25 psi
Incoming Temp (min)	
low-temp	120° F
high-temp	180° F
Incoming Temp (recommended)	
low-temp	140° F
high-temp	180° F

### DRAIN

Drainline Size	1 1/2"
----------------	--------

### VENT HOOD

Flow-Cubic Feet per Minute	600
----------------------------	-----

### CHEMICAL SANITIZER RINSE

Minimum chlorine, ppm (low-temp)	50
----------------------------------	----